

**Hate Rust**  
**ROVALize it Now!**

**Roval Cold Galvanizing Compound**



| Global Website |  
**rovalworld.com**

| Product & Technical Inquiry |  
**global@roval.cn**

ROVAL has obtained ISO9001 quality management system and ISO14001 environment management system

 **ROVAL**

**ROVAL CORPORATION**

1-1, Nomuramotomachi,  
Hirakata, Osaka,  
573-0132 JAPAN  
TEL: +81-72-894-7590  
FAX: +81-72-894-7593  
Web: roval.co.jp

**SHANGHAI ROVAL  
ZINC RICH PAINT CORPORATION  
ROVAL(SHANGHAI)  
SALES & TRADING CORPORATION**

No.393, Fenggong RD, Malu, Jiading,  
Shanghai, 201801, CHINA  
TEL: +86-21-69156584  
FAX: +86-21-69152081  
Web: roval.cn



# Hate Rust?

# ROVALize it Now!

## Roval Cold Galvanizing Compound



ROVAL has a high 96% zinc content in its dry film and its anti-corrosion performance is equivalent to that of hot-dip galvanizing. Whether being used as an alternative to hot-dip galvanizing for the overall coating of steel structures, or being applied to the restoration and renovation of galvanized surfaces, ready-to-use ROVAL cold galvanizing has been widely used for more than half a century for the anti-corrosion protection of steel structure in various fields.

### Renovation of galvanized surfaces



Connection corridor between the buildings



Stereo garage

ROVAL can effectively extend the service life of galvanized sheets

### An alternative to hot-dip galvanizing



Hall facilities



Weak parts that are easily deformed under high temperature

ROVAL can be used as an alternative to do anti-corrosion protection of larges parts that can't be put into the zinc-plating tank and of weak parts that are easily deformed under high temperature.

### Restoration of galvanized surfaces



Cut surfaces



Welding parts

ROVAL is the best choice to repair the cutting surface, welding parts, and the galvanizing layers without zinc coating or with zinc coating falling off.

### Anti-corrosion protection to steels



Steel fence



Connection components

ROVAL can achieve the same anti-corrosion effect with that of hot-dip galvanizing by being directly coated on the surface of the steel to prevent the steel from rust.

## CONTENTS

Product Description P.03 Equivalent anti-corrosion performance to hot-dip galvanizing  
**ROVAL**  
Cold Galvanizing Compound



P.04 Better heat resistance and solvent resistance  
Achieve high quality coating system by using together with top coat  
**EPO ROVAL**  
Cold Galvanizing Compound



P.05 Suitable for repairing old galvanizing surfaces  
**ROVAL SILVER**  
Zinc Rich Compound



P.06 Choose the right metallic spray according to different application purposes  
**COVER SERIES**  
ZC Galvanizing Repair Metallic Spray & MC Color Matching Metallic Spray



Verification of Anti-Corrosion Effect P.07 Test 1 ROVAL vs Other anti-corrosion paints  
P.09 Test 2 ROVAL vs Hot-dip galvanizing  
P.11 Comparision between ROVAL and Normal paints  
P.12 Color weathering of Roval products

User Guides P.13

Applications P.14





Ready-to-use single pack type cold galvanizing.  
Equivalent anti-corrosion performance to hot-dip galvanizing

ROVAL

Cold Galvanizing Compound

With 96% zinc content in its dry film, ROVAL has the strongest anti-corrosion and the highest cost-effective performance among ROVAL product line.

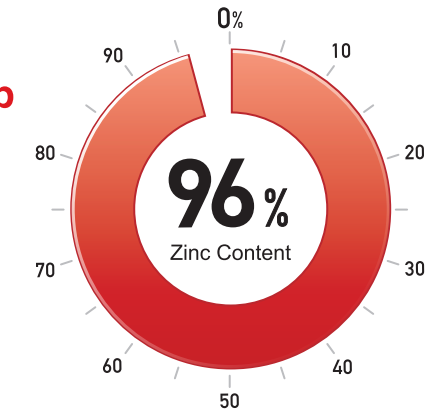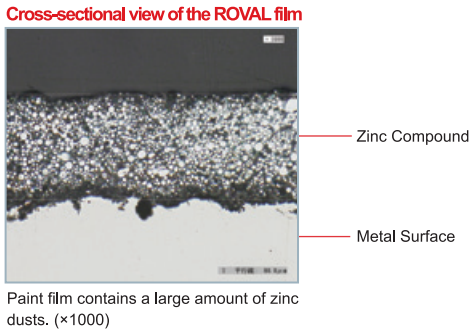

Anti-corrosion Effect ★★★★★  
<Anti-corrosion Effect Sample>  
Hot-dip Galvanizing ★★★★★  
Normal Paints ★

Properties

**Single Pack Type**  
Easy to handle  
No pot life or mixing required

**Color Fading**  
The paint color naturally weathers with exposure like that of hot-dip galvanized surfaces.

**Film Hardness**  
Hardness of the film improves with exposure.



Type	Aerosol 420ml	2.5kg	10kg	25kg
Theoretical coverage	0.5m <sup>2</sup>	5m <sup>2</sup>	20m <sup>2</sup>	50m <sup>2</sup>
Dry to Touch Time (minute, @ 25°C)	20-30*1			
Recommended Film Thickness	80μm*2			
Packaging	24 / case	4 / case	1 / case	drum

\*1: At 40μm  
\*2: Two 40μm coats (Total film thickness: 80μm)

**RoHS** Compliance with the EU Regulations on Organic Chemicals

Matching

ROVAL Thinner 0.8kg / 14kg  
The special thinner for R,Ra and RS

Match with R, Ra, RS

ROVAL MC Color Matching Metallic Spray 420ml

Match with R

ROVAL ZC Galvanizing Repair Metallic Spray 420ml


Match with R

Better heat resistance and solvent resistance

Achieve high-quality coating system by using together with top coat

EPO ROVAL

Cold Galvanizing Compound

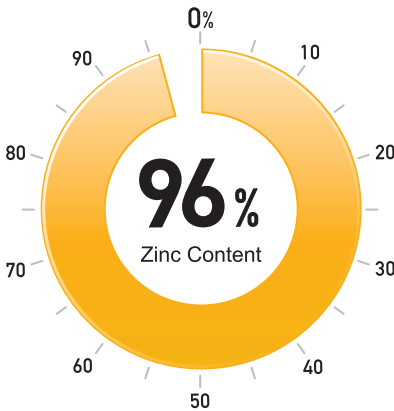

Anti-corrosion Effect ★★★★★  
<Anti-corrosion Effect Sample>  
Hot-dip Galvanizing ★★★★★  
Normal Paints ★




Type	2.5kg	25kg
Theoretical coverage	5m <sup>2</sup>	50m <sup>2</sup>
Dry to Touch Time (minute, @ 25°C)	20-30*1	
Recommended Film Thickness	80μm*2	
Packaging	4 / case	drum

\*1: At 40μm  
\*2: Two 40μm coats (Total film thickness: 80μm)

**RoHS** Compliance with the EU Regulations on Organic Chemicals

\*1 EPO ROVAL THINNER is an exclusive product for fixing viscosity of EPO ROVAL. DO NOT use ROVAL THINNER. Dilution rate must be less than 5% (weigh ratio)

EPO ROVAL can be used together with top-coat from other companies

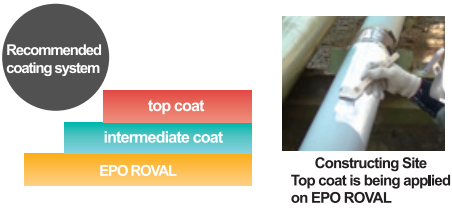

Coating process of iron surface


Process	Paint	Coating interval
pretreatment	Prepare the metal surface by sandblasting or with appropriate power tools to remove all contamination on the surface	
primer 1	EPO ROVAL	≥ 30 mins
primer 2	EPO ROVAL	≥ 24 hours
intermediate coat	Modified Epoxy paint*2	Time specified by paint manufactures.
top coat	Urethane or Fluorine paint	

\*2 Serious blistering may occur after some coatings are applied, please do mist coat treatment.  
Note: Do not use phthalate, alkyd and other oil-based paint, because they will cause the film peeling off.

Suitable for repairing old galvanizing surfaces or as a topcoat for ROVAL Cold Galvanizing Compound

# ROVAL SILVER

Zinc Rich Compound

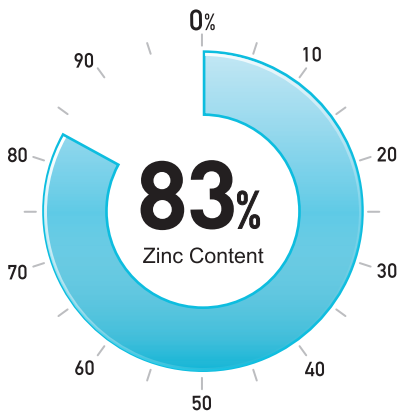

### Properties




**Contains Aluminum**  
Aluminum pigments provide barrier protection to a metal.



**Single Pack Type**  
Easy to handle  
No pot life or mixing required.



**Color Fading**  
The paint color naturally weathers with exposure like that of hot-dip galvanized surfaces.



**Film Hardness**  
Hardness of the film improves with exposure.



**Anti-corrosion Effect** ★★★★★  
<Anti-corrosion Effect Sample>  
Hot-dip Galvanizing ★★★★★★  
Normal Paints ★




Type	Aerosol 420ml	1.5kg	7kg	20kg
Theoretical coverage	0.4m <sup>2</sup>	3m <sup>2</sup>	14m <sup>2</sup>	40m <sup>2</sup>
Dry to Touch Time (minute, @ 25°C)	20-30*1			
Recommended Film Thickness	80μm*2			
Packaging	24 / case	4 / case	1 / case	drum

\*1: At 40μm  
\*2: Two 40μm coats (Total film thickness: 80μm)

**RoHS** Compliance with the EU Regulations on Organic Chemicals

### Use ROVAL as primer for better anti-corrosion performance.

To achieve the best anti-rust effect, ROVAL Cold Galvanizing Compound is highly recommended to be used as primer when using ROVAL SILVER Zinc Rich Compound to do anti-corrosion pretreatment of steel, large-area coating or in severe corrosive environment. If applying ROVAL SILVER Zinc Rich Compound alone without primer, the thickness of the coating film must be larger than 80μm.

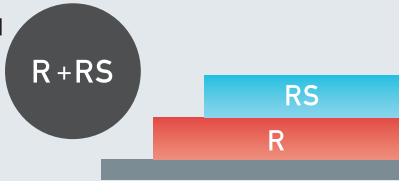

### Galvanizing Repair Metallic Spray

# ZC

Anti-corrosion Effect ★★

69%  
Zinc  
Content



Practical coverage..... 1m<sup>2</sup>  
Dry to Touch Time..... 20-40 minutes  
Recommended Film Thickness... 40μm  
Packaging ..... 24 / case

### Properties



**Power Up!**  
Reinforce anti-corrosion performance as a topcoat to ROVAL.



**Repairing Spray**  
Suitable for touch-ups of damaged or thinly galvanized surfaces.



**Temporal Sheen**  
Silver sheen color weathers with exposure like that of hot-dip galvanized surfaces.



**Anti-corrosion protection**  
Contains 69% zinc as well as aluminum compounds to do effective anti-corrosion protection.


### Application



### Color Matching Metallic Spray

# MC

(No Anti-corrosion Effect)

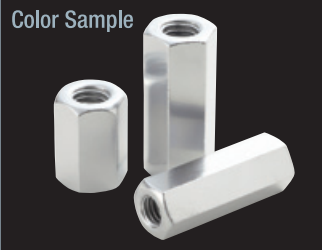

**Spray MC after applying ROVAL R on cut profiles, welds, and non-plated areas for maximum protection.**



**No anti-corrosion effect.**

Weathering is slowed by excessively thick film.  
Exposure conditions will affect the weathering rate.

Practical coverage..... 3m<sup>2</sup>  
Dry to Touch Time..... 15-30 minutes  
Recommended Film Thickness..... 10μm  
Packaging ..... 24 / case



Before application



After application  
MC applied at the lower left




After 6 months exposure


MC has a metallic sheen color and the silver sheen color weathers with exposure like that of hot-dip galvanized surfaces, it is the perfect match to color of galvanizing and it is particularly suitable for gray coating touch-up.

### Application

#### Gray Coating Touch-Up

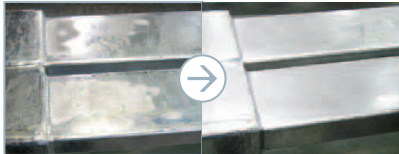

#### Topcoat for ROVAL R

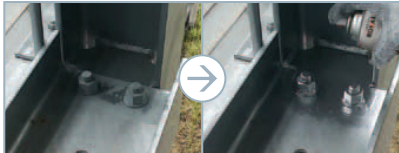



ROVAL has the distinctive property to stop rust creeping under the film.

We have proven results from a 36-month atmospheric exposure test concluded at Japan Weathering Test Center in Miyako-jima Island testing ROVAL and other companies' paints for anti-corrosion performance.

These results and pictures prove that ROVAL protects steel surfaces from rust creepage with its electrochemical reaction, whereas other paints allowed the rust to spread from the cross-cut areas.



<Miyakojima Island Testing Ground>

Miyakojima Island is located the far southern portion of Japan, with roughly the same latitude as Florida, U.S.A. The island is surrounded by a lot of deteriorating factors such as high temperature, high humidity, strong sunshine, and a salt-rich atmosphere. The environment is known to be the best for accelerating film deterioration.

Results of Comparison Tests: ROVAL vs Other anti-corrosion paints

	ROVAL (80μm)	Epoxy paint + Urethane topcoat	Epoxy paint + Fluoropolymer topcoat	JIS anti-corrosion paint + Phthalic topcoat
Before exposure				
After 36 months exposure				
Expose the steel substrates				
	Rust does not spread from cross-cut.	Rust from cross-cut spreads.	Rust from cross-cut spreads.	Rust is found other than cross-cut.











Anti-corrosion performance of ROVAL is equivalent to the highest grade of hot-dip galvanizing available in Japan.

In order to compare the anti-corrosion performance of ROVAL with those from the hot-dip galvanizing process, corrosion accelerating tests were conducted by the Japan Paint Inspection and Testing Association in accordance with Japanese standard “\*JIS H8502-1999”. The results and pictures from the test show that ROVAL has an equivalent anti-corrosion performance to hot-dip galvanizing. ROVAL has been certified to have equivalent anti-corrosion performance as hot-dip galvanizing by the Council for Construction Technology Review and Certification in Japan

- <Salt Spray Test>  
Accelerated corrosion testing by spraying salt water.
- <Cyclic Corrosion Test>  
Accelerated corrosion testing involving cyclic exposure to salt fog, dry and wet conditions.
- <CASS Test>  
Copper accelerated acetic salt spray test.

\*JIS H8502-1999 is base on ISO standards: 4540, 4541, 8407, 8565, 9227, and 10062.



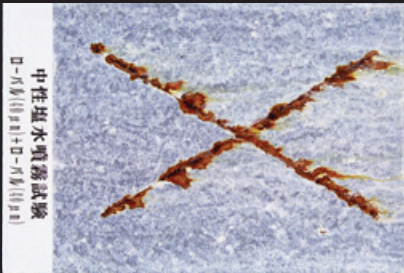
Results of Comparison Test:  
ROVAL vs Hot-dip galvanizing

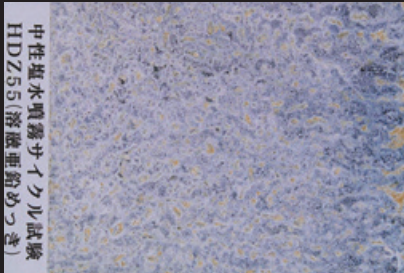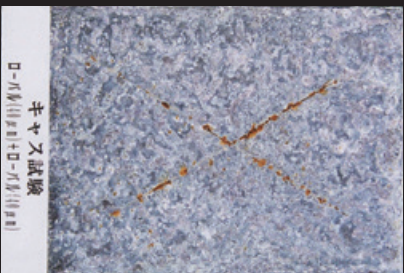	ROVAL (80μm)	Hot-dip galvanizing (Zinc 550g/m <sup>2</sup> )
Before testing		
Salt Spray Test 2256hrs		
Cyclic Corrosion Test 1512hrs		
CASS Test 168hrs		



ROVAL vs Normal paints

ROVAL  
(Anti-corrosion by electrochemical reaction)






Mechanisms of Anti-corrosion

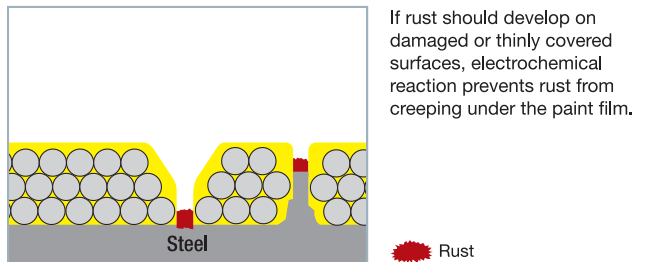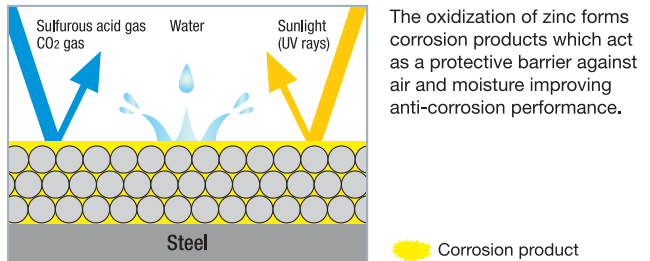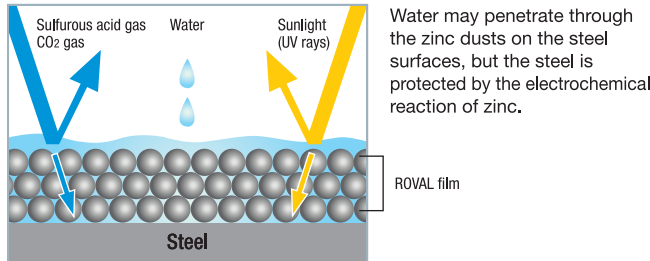

Maintenance

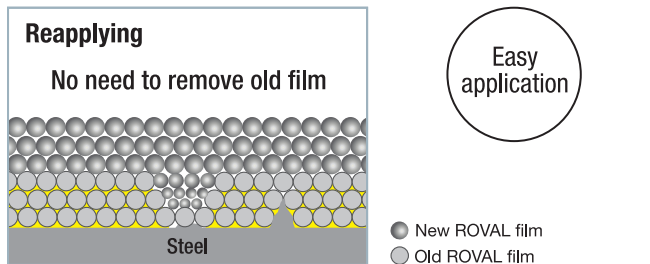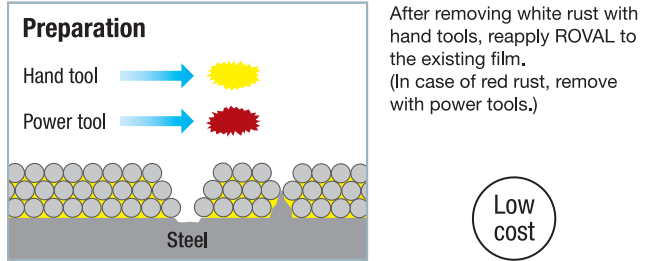


Normal paints  
(Anti-corrosion by barrier protection)

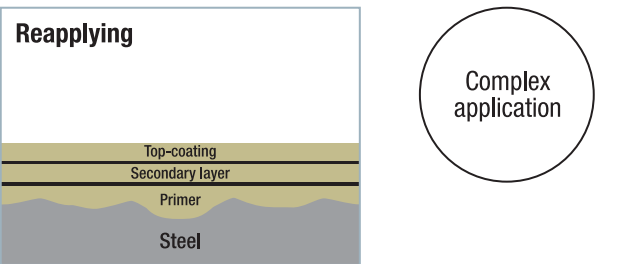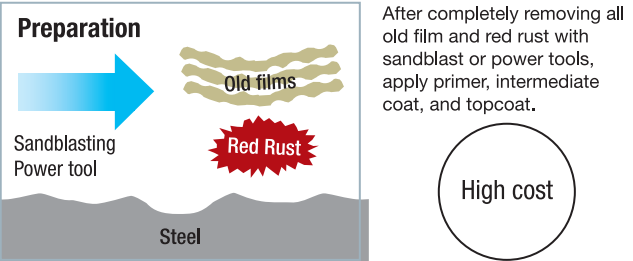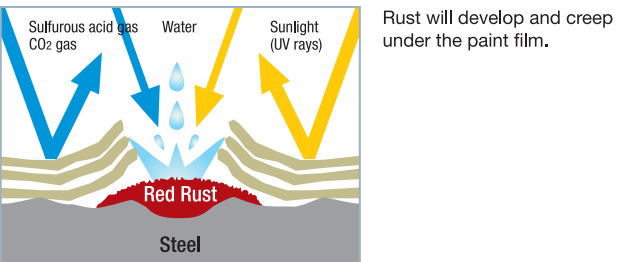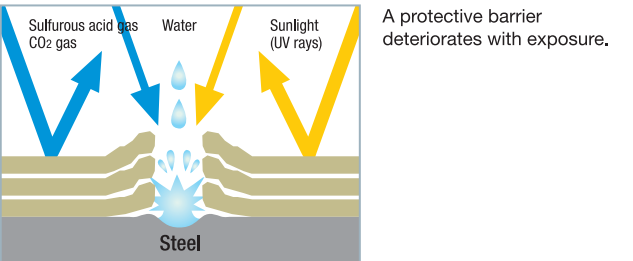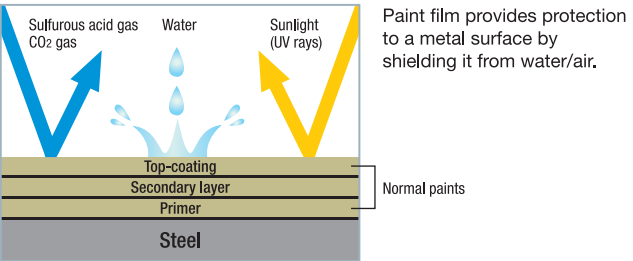

Color weathering of Roval products

The film of Roval products weathers the same as galvanized materials by exposure. This characteristics makes repaired unapparent.

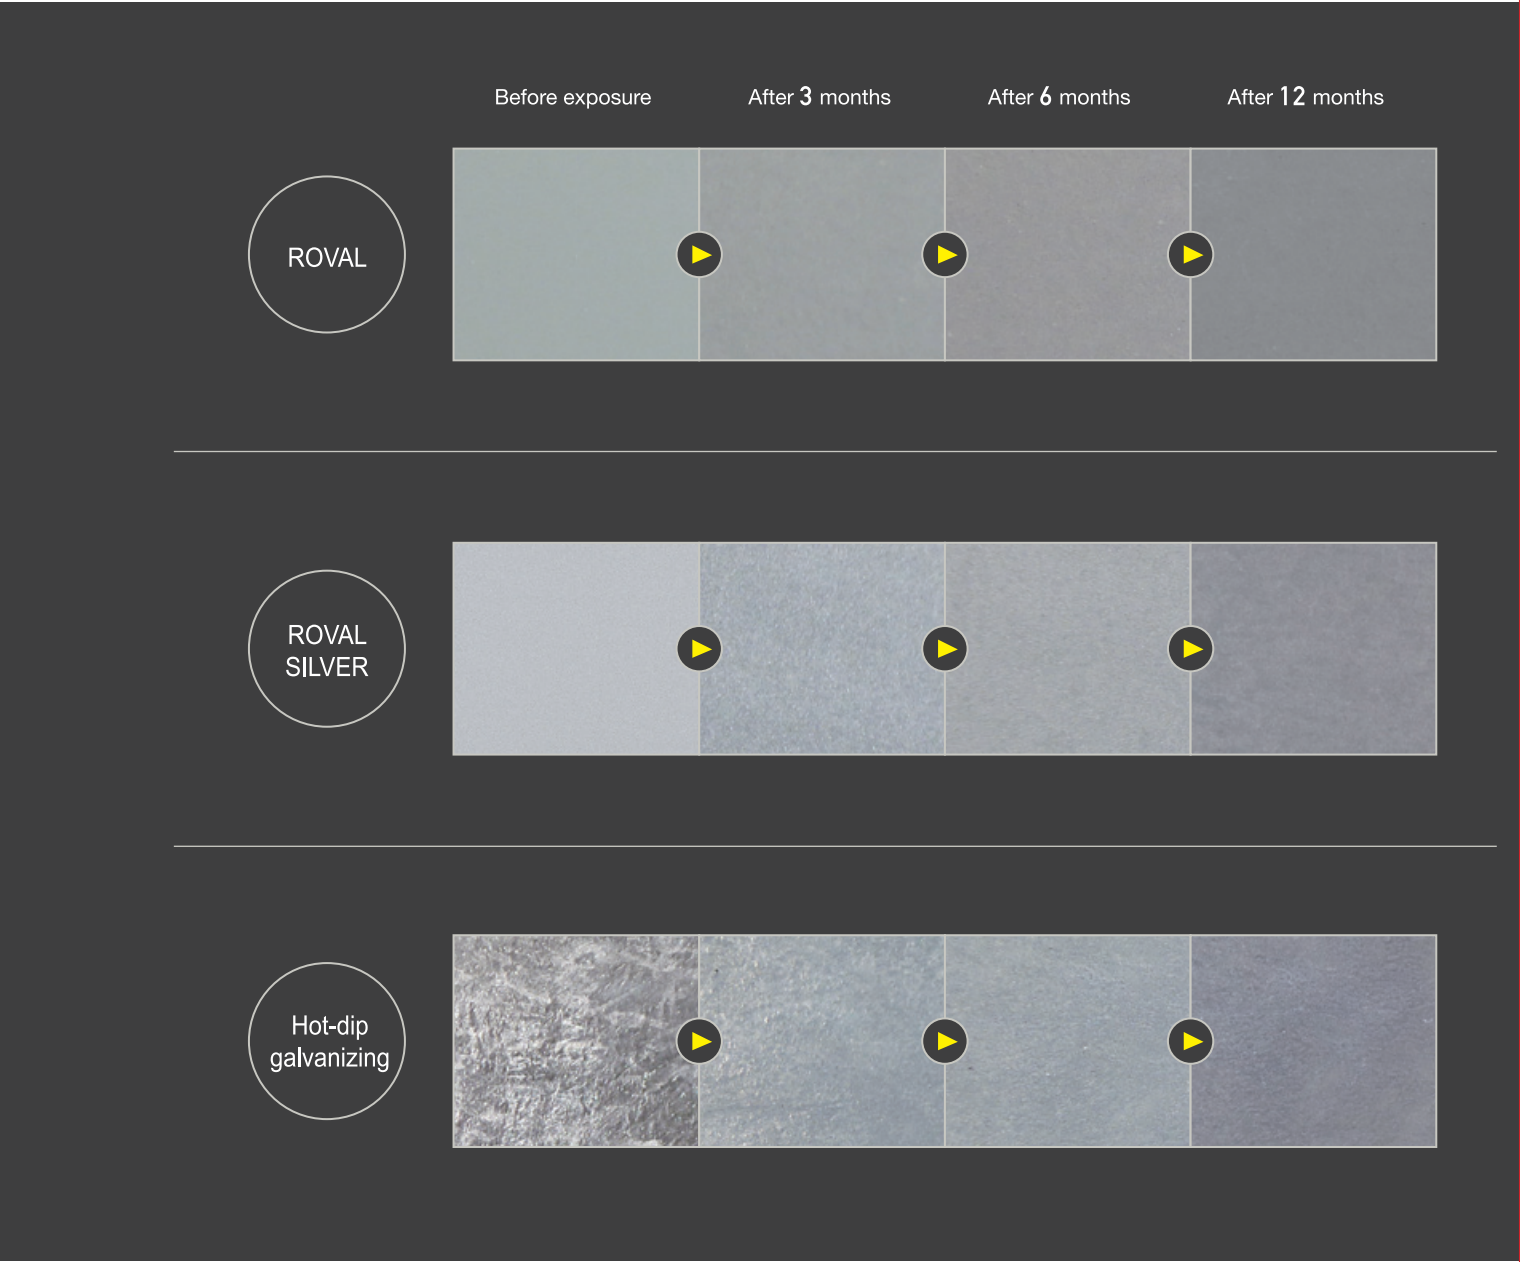

\* Deviations can occur between the samples shown, the delivered products and the standard references due to differences in shooting angle, light, and the surroundings.




User Guides

<Tips>  
**ROVAL has to be applied DIRECTLY to metal surfaces.**  
The direct contact between the zinc and the metal surface will result in cathodic reaction.

**✗ Never use primers.**  
Primers will compromise the performance of Roval products.


3 important points

Point 01 **Surface Preparation**




Prepare the metal surface by sandblasting or with appropriate power tools. Remove all contamination on the surface such as moisture, oil, mill scale, rust, and old paints.

Point 02 **Adequate Agitation of Product**



Agitate the products well to obtain uniform density.  
**Dilution is not required.**  
\* Only when the product thickens, use aromatic thinner such as Xylene. (Within 5% of paint weight)


Point 03 **Sufficient Film Thickness**



**Apply two coats. (Each coat: 40μm)**  
**Total dry film thickness = more than 80μm (Coating interval:30 min)**  
**Do not spread the paint too thin.**  
Anti-corrosion performance is proportional to DFT.


Application methods

**Brush**




E.g. Soft brush

**Roller**



E.g. Long haired-roller

**Conventional/air-less spray**




**The importance of Surface Preparation**  
**Surface pretreatment directly affect the anti-corrosion performance and service life of coating film.**  
To get the best anti-corrosion performance, surface pretreatment is very important.  
Brushing only after the clean and bare metal surface is exposed out by using sandblasting or power tools to remove the contamination on the meal and galvanizing surfaces.


Results of salt spray experiments under different surface preparation conditions

	Brushing on the clean and bare metal surface	Brushing after roughly removing the rust by hand tools.	Brushing directly on the rust (without surface preparation)
Before test			
Salt Spray Test (1008 hrs)			
	No rust is found	Rust from cross-cut	Rust, blisters and abscission of coating film occurred.

**! Wrong Application**




Applying product to rusted surfaces




Applying products to painted surfaces

Applications


From ordinary to extreme  
Various ways to use the Roval products




^ Bridges




^ Marine equipment




^ Buildings



^ Gratings



^ Un-galvanized areas









^ Bolts



Steel Recycling Project

What if the steel structure becomes old?

# Restore it with ROVAL!

 <p>Before</p>	 <p>Before</p>	 <p>Before</p>
 <p>After</p>	 <p>After</p>	 <p>After</p>

Applying ROVAL on worn galvanized surfaces prolongs a life of steel structures. This property leads to the sustainability of steel resources. It is time to switch from "Scrap & Build" to "Recycle."  
**Let's kick start with ROVAL!**