

# Performance of ROVAL

Exposure test results (Japan weathering test center in Miyakojima Island)




Miyakojima Island is located in the far southern part of Japan, with roughly the same latitude as Florida, U.S.A. The Island is surrounded by a lot of deteriorating factors such as high temperature, high humidity, strong sunshine, and a salt-rich atmosphere.

## From normal paint to ROVAL



## Color weathering of ROVAL products

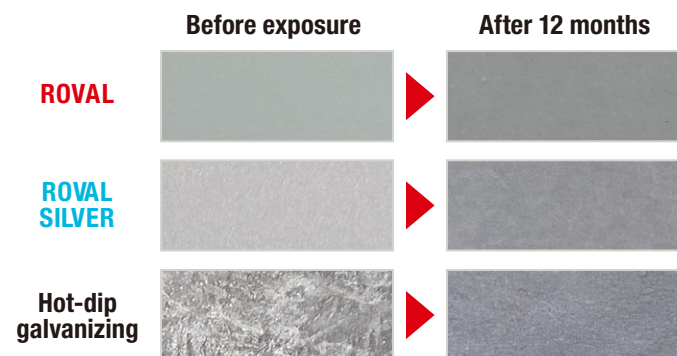

## Certified anti-corrosion performance



### Cold Galvanizing ROVAL Method


ROVAL has been certified to have equivalent anti-corrosion performance as hot-dip galvanizing by the Council for Construction Technology Review and Certification in Japan.

# ROVAL Superior anti-corrosion paint

## Equivalent anti-corrosion performance to hot-dip galvanizing



## Applications

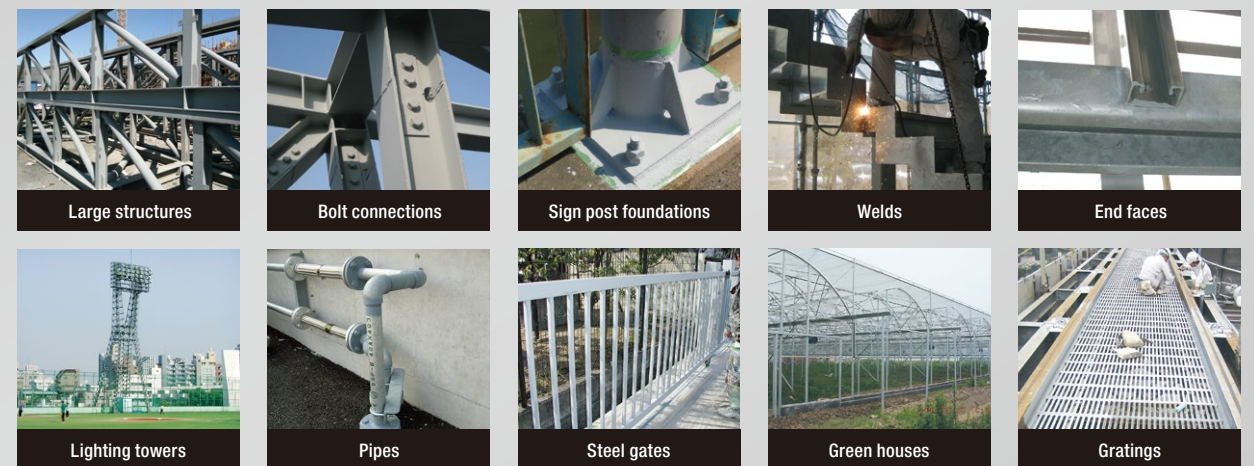


Distributor in Vietnam

**COATURE VIET NAM CO., LTD**  
 Vinadco Building, 1-3 Ho Quy Ly Street,  
 Thanh Khe Tay Ward, Thanh Khe Dist, Da Nang,  
 50308 Viet Nam  
 TEL: +84(0)236-3770-540  
 Email: info@coaturevn.com  
 https://www.coaturevn.com

SINCE 1955  
**ROVAL** rovalworld.com

ROVAL CORPORATION (Japan)  
 SHANGHAI ROVAL ZINC RICH PAINT CORPORATION  
 ROVAL (SHANGHAI) SALES & TRADING CORPORATION

2025.03

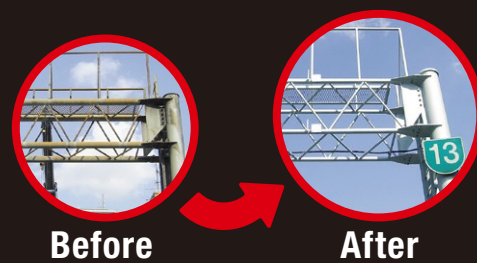

Cold Galvanizing Compound  
**ROVAL**  
 ローバル





## Cold Galvanizing Compound

# R

## ROVAL


Cold Galvanizing Compound

ローバル

### Equivalent anti-corrosion performance to hot-dip galvanizing.

Zinc Content  
**96%**

Meets ASTM A780, ISO1461

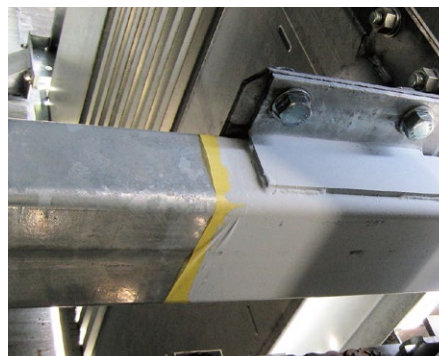

Color Sample



Color : Gray



Volume	420ml Aerosol	1kg	2.5kg	10kg	25kg
Theoretical coverage (80µm)	0.5m <sup>2</sup>	2m <sup>2</sup>	5m <sup>2</sup>	20m <sup>2</sup>	50m <sup>2</sup>

## Silver Zinc Rich

# RS

## ROVAL SILVER

Zinc Rich Compound

ローバル シルバー

### Finishes in a color similar to hot-dip galvanizing.

Zinc Content  
**83%**

Contains Aluminum

Meets ISO1461



Color Sample



Color : Silver




Volume	420ml Aerosol	0.7kg	1.5kg	7kg	20kg
Theoretical coverage (80µm)	0.4m <sup>2</sup>	1.4m <sup>2</sup>	3m <sup>2</sup>	14m <sup>2</sup>	40m <sup>2</sup>


# MC

## Perfect Color Matching Metallic Spray (No anti-corrosion effect)

Gray coating touch-up



Before



After

Topcoat for ROVAL



Repair with ROVAL



Apply ROVAL MC for color matching

ROVAL MC Color Matching Metallic Spray for Galvanized materials  
Coverage : 3m<sup>2</sup>

## Features Ready-to-use single liquid type

Dilution is unnecessary so painting is very easy.

No troublesome work, like mixing two liquids.

Aerosol product lineup.



## Application methods

Brush



Roller



Conventional / Air-less spray



## Necessary steps

**ROVAL has to be applied DIRECTLY to metal surfaces.**

The direct contact between the zinc and the metal surface will result in cathodic reaction.

## Prohibited steps

**Never use primers.**

Primer will compromise the performance of Roval products.

## 3 important points

**1 ▶ Surface preparation**




Prepare the metal surface by sandblasting or with appropriate power tools.  
Remove all contamination on the surface such as moisture, oil, mill scale, rust, and old paint.

**2 ▶ Adequate agitation of product**



Agitate the products well to obtain uniform density.  
**Dilution is not required.**  
\*Only when the product thickens, use aromatic thinner such as Xylene. (Within 5% of paint weight)

**3 ▶ Sufficient film thickness**

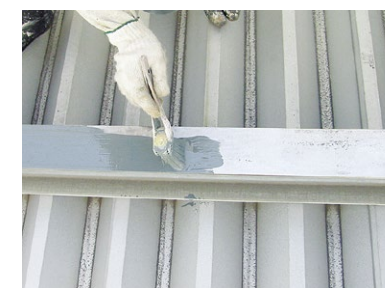

Apply two coats. (Each coat: 40µm)  
Total dry film thickness = more than 80µm  
**Do not spread the paint too thin.**  
Anti-corrosion performance is proportional to dry film thickness.  
Coating interval : 30~60min

**Wrong application**

Applying product to rusted surfaces



Applying product to painted surfaces

