



ROVAL MC Color Matching Metallic Spray for Galvanized materials

Coverage :	3m² ( 1coat )
Dry to touch time :	15 -30 minutes
Film thickness :	10µm ( 1coat )
Packaging :	24 cans / case

## **Perfect Color Matching Metallic Spray** for Galvanized Materials

ROVAL MC Color Matching Metallic Spray for Galvanized materials, which is ideal for color matching after hot-dip galvanization and for hiding blemishes or ROVAL repairs.



After painting

Topcoat for ROVAL



Repair with ROVAL



Apply ROVAL MC for color matching

## Difference from Normal silver paint


Sometimes see the use of Normal silver paint for hiding blemishes on galvanized surfaces.

At first, the galvanized surfaces is also shiny, so it is matching.

However, when the luster is lost over time, the silver part stands out.

ROVAL MC is designed to lose its luster over time, just like galvanizing, and at the end ROVAL MC film disappears, so the repaired part will not stand out forever.

The photo below shows a plate with ROVAL MC and Normal silver paint coating on the upper half of a galvanized plate.

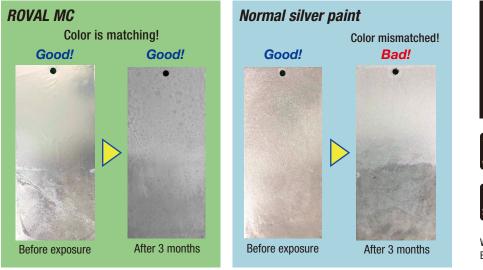

## Distributor in Malaysia, Singapore, Brunei, Indonesia

## **ZINCGREY MALAYSIA PLT**

NO.47, Jalan I-PARK SAC 4, Taman Perindustrial I-PARK, 81400 Senai, Johor, Malaysia TEL: +60-7-597-0777 Email: info@zincgrey.com https://www.zincgrey.com







No anti-corrosion effect.



Spray ROVAL MC after applying ROVAL on cut surfaces, welds, and non-plated areas for maximum protection.

Weathering is slowed by excessively thick film. Exposure conditions will affect the weathering rate.



**ROVAL CORPORATION (Japan)** SHANGHAI ROVAL ZINC RICH PAINT CORPORATION **ROVAL (SHANGHAI) SALES & TRADING CORPORATION** 

