

ZC

Ideal for simple repairs of galvanized surfaces


The silver sheen color of ROVAL ZC Galvanizing Repair Metallic Spray blends in with the color of hot-dip galvanized surfaces. 69% zinc in its dry film provides effective anti-corrosion performance and the aluminum pigments creates barrier protection. Suitable for repairing un-galvanized surfaces and for small touch-ups.



ROVAL ZC Galvanizing Repair Metallic Spray

Coverage :	1m ² (2 coats)
Dry to touch time :	20 -30 minutes
Film thickness :	40µm (20µm x 2 coats)
Packaging :	24 cans / case

Simple repairs of galvanized surfaces

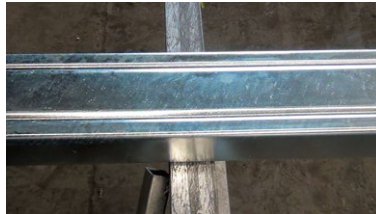

Before painting



Spraying




After painting

Color weathering of ROVAL ZC


The film of ROVAL ZC weathers the same as galvanized materials by exposure. This characteristics makes repaired unapparent. **The color change is proof that the film protects iron by oxidizing zinc in the coating.** This color change is not abnormal and does not affect the rust prevention performance. The photo below shows a plate with ROVAL ZC coating on the upper half of a galvanized plate.

ROVAL ZC

Color is matching!



Before exposure



After 3 months

Color sample



Meets ASTM A780 Specifications



ROVAL ZC Galvanizing Repair Metallic Spray



Power Up!

Reinforce anti-corrosion performance as a topcoat to ROVAL.



ROVAL Cold Galvanizing Spray



Distributor in Malaysia, Singapore, Brunei, Indonesia



ZINC GREY MALAYSIA PLT

NO.47, Jalan I-PARK SAC 4, Taman Perindustrian I-PARK,
81400 Senai, Johor, Malaysia
TEL: +60-7-597-0777
Email: info@zincgrey.com
https://www.zincgrey.com



SINCE 1955 ROVAL rovalworld.com

ROVAL CORPORATION (Japan)
SHANGHAI ROVAL ZINC RICH PAINT CORPORATION
ROVAL (SHANGHAI) SALES & TRADING CORPORATION

